



# 1808 AUTO DIALER TELEPHONE INTERCOM SYSTEM



surface mount  
with built in  
directory/  
message window



surface mount




**led lighting**  
illuminates keypad and directory



**flash entry codes**  
allow entry on a single day only, then  
automatically deactivate themselves



**dtmf tone output**  
allows these systems to be used  
with PBX, KSU and telephone  
systems with auto-attendants



**modular**  
design makes installation and  
service easy

- Provides visitor access control in residential or commercial applications
- Visitors use the 1808 to communicate with a resident, who can then grant or deny them access from their touch-tone phone
- Provides service for up to 1000 residents
- Programmable directory codes can be set from 1 to 4 digits
- Ideal for residential, multi-home applications with limited space, or do not require a directory, or where a separate directory exists

FEATURES



## ACCESS CONTROL SOLUTIONS





# 1808 AUTO DIALER TELEPHONE INTERCOM

The model 1808 is an ideal telephone entry system that is suited for applications that have limited space and can be used in residential as well as commercial applications. Visitors are easily identified by voice communication and can be granted or denied access directly from a touch-tone telephone. With the small built in directory option, this system is ideal for small, multi resident applications.

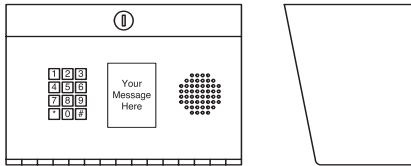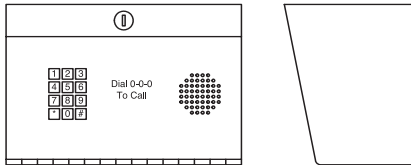

## 1808 Surface

with and without directory/message window  
11" W x 7.5" H x 6.5" D  
27.9cm W x 19cm H x 16.5cm D

## 1808 Specs

### Communication

True full duplex  
Hands free

### Mounting Styles

Surface mount with lighted key pad

### Capacity

125, 500 or 1000 phone numbers,  
10 area codes  
4 digit entry codes same as system memory  
5 digit entry codes = 6

### Door/Gate Control

Two relays allow for control of both a vehicular gate and a pedestrian gate

### Programming Methods

System keypad  
Touch-tone telephone

### Advanced Features

Programmable directory codes can be set from 1 to 4 digits in length  
10 & 11 digit dialing capability  
Built in clock/calendar  
Time clock has its own backup power source  
Entry code time zones  
Four hold-open time zones  
Flash entry codes  
DTMF tone output allows for use with KSU, PBX and systems with an auto-attendant  
Two special inputs can be programmed for relay activation or dial-out function  
Time zone restrictions on selected entry codes

### Options

Available with small built-in directory (not lighted)  
Heater kit - recommended when temperatures routinely fall below 10°F (-12°C)  
Camera Ready:  
Optional B&W or Color CCTV camera\*  
\*may require additional CCTV equipment

### Operating Temp

10°F to 145°F  
-12°C to 62°C  
Optional heater kit available for colder climates

### Electrical Requirements

16 VAC, 20 VA System power (250 ma)  
U.L. listed power transformer provided  
Ringer equivalence: 0.0A Jack Type: RJ11C or W

### Safety Standards

FCC (US) DUF6VT-12874-OT-0  
DOC (CAN) 1736 4507 A  
Complies with UL 294  
ETL Listed

### Shipping Weight

Approximately 15-20 lbs (7-9 kg)

### Warranty

2 year limited factory warranty

Distributed by:

## DOORKING, INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A. Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2006 All Rights Reserved. Product specifications may change without notice. Rev. 4/06

## MEMBER:

