


PREDATOR WIFI



PREDATOR WIFI VIDEO
WiFi / 3G Video Intercom

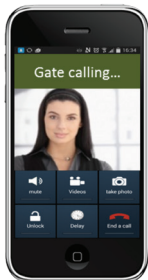

Simple setup by mobile phone. Connect to the system video directly through your phone's wifi, enter the pass code for the home hub wifi and your devices are connected.

View the gate/door any time with monitoring mode!

Open gates with your phone.

PREDATOR WIFI VIDEO


- Speak to, and see your visitor from your smart-phone.
- Easy wireless connection to existing home wifi.
- Long range directional patch antenna at gate (up to 200 yards)
- Can call up to 4 devices at the same time.
- Get a video call from your gate / door even when you're away
- No SIM card, no call charges (data charges may apply when phone not connected to wifi).

→ T: US. 1877 995 8155
→ info.bft@bft-usa.com
→ www.bft-usa.com



tuned to you

BFT Americas, Inc.
6100 Broken Sound Parkway N.W.,
Suite 14
Boca Raton, FL, 33487

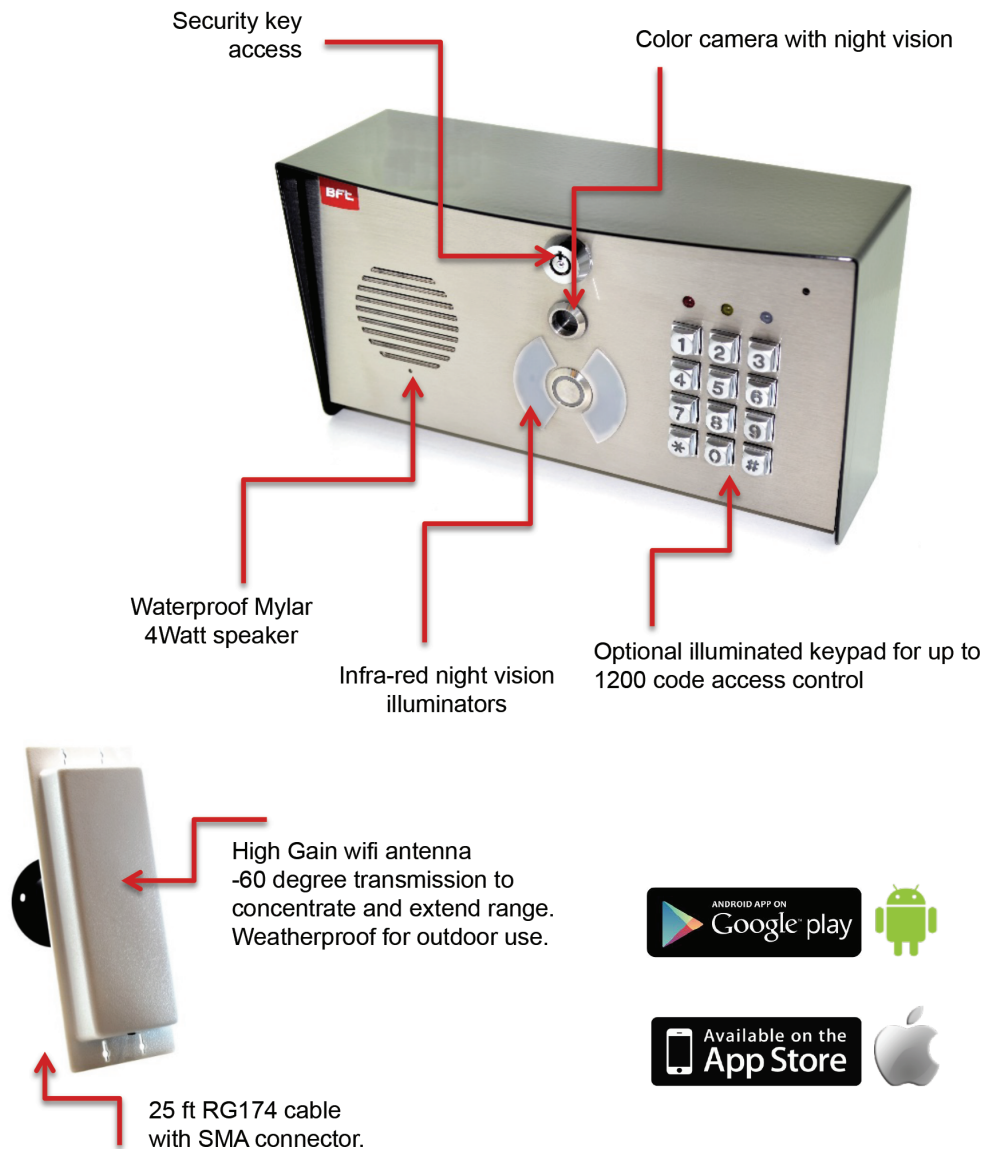

Technical Details

Power Supply	12-15vdc (adaptor included)	App name	Predator Wifi
Current Consumption	50mA standby, 300mA calling.	Audio	Half duplex loud speaker mode (Press mic icon to speak)
Relay Outputs	1	Keypad option	yes
Relay type	N/O & N/C contacts	Keypad relays	3
Relay time	Adjustable 1-10 secs	Keypad codes	1200
Relay load	2A 24v AC max		
IP rating	IP55		
Camera	Colour, 90 degree, 640x480 pixel		
Night vision	Yes, by infrared illumination		

→ T: US. 1877 995 8155
 → info.bft@bft-usa.com
 → www.bft-usa.com



tuned to you

BFT Americas, Inc.
 6100 Broken Sound Parkway N.W.,
 Suite 14
 Boca Raton, FL, 33487