


D-TEK-LM™

Board Type Vehicle Loop Detector

FEATURES

Full fledged plug-in detector that works with many of the Chamberlain operators, like 670, 575, 585 & 595 models.*

- Loop Diagnostics
- Loop Isolation Transformer
- Loop Conditioner
- Surge Protection
- Loop Frequency Counter
- 10 Gold Plated Sensitivity Controls
- 8 Gold Plated Function Controls
- 6 Gold Plated Controls for Frequency, Reset & Frequency Counter
- Two High Intensity LED Indicators

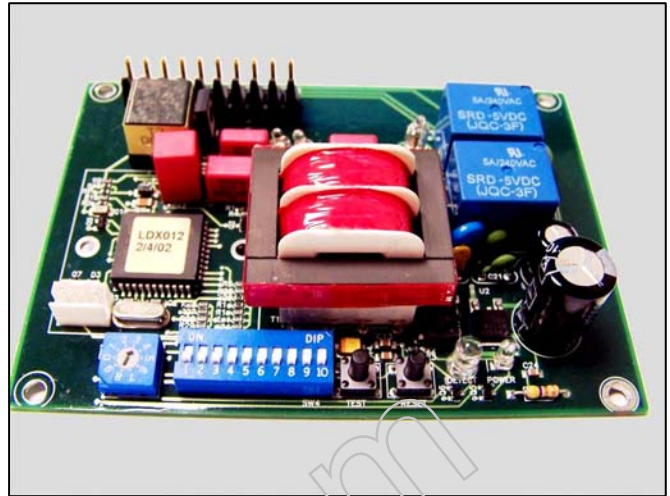

APPLICATIONS

The D-TEK-LM™ is used as replacement for the Manufacturer original Vehicle Detectors for the Models 670, 575, 585 and the 590 operators.*

The D-TEK-LM™ may also be used in any location protected from the weather to detect vehicles for annunciation, triggering cameras, lighting, etc. where 24 Volt AC power is provided. Wiring hookup is simplified using the HAR-7 wiring harness.

ORDERING INFORMATION

D-TEK-LM

24V AC Board Detector

(Plug in compatible with the Chamberlain 575,585, 595 and 670 Model Operators)*

HAR-7

Female 10 Position Harness

PR-XX

EMX Lite Preformed Loop XX= size

We accept Visa, MasterCard, American Express card orders and company purchase orders with approved credit.

* Models 575, 585, 595 and 670 are trademarks of The Chamberlain Group Inc and Elite Access Systems Inc.

EMX INDUSTRIES, INC.

4564 Johnston Parkway
Cleveland, Ohio 44128

Telephone:

1-800-426-9912
216-518-9888

Fax: 216-518-9884

WEB: <http://www.emxinc.com>


Email: salesupport@emxinc.com

Technical Support: technical@emxinc.com

EMX
INDUSTRIES, INC.



EMX LITE PREFORMED LOOP

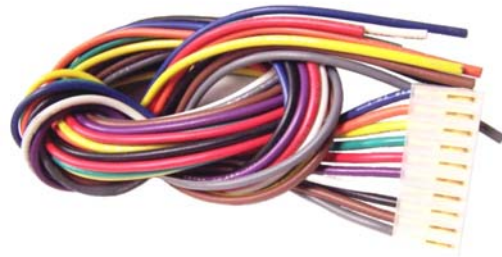

HAR-7 10 PIN FEMALE HARNESS

Technical Data

Power supply	24V AC
Current draw	100 mA max.
Dimensions	L= 4.125in (104mm) W= 2.687in (68mm) H= 1.1in (28mm)
Weight	0.32 lbs. (144.6g)
Loop Inductance	20...2000 μ H (Q factor \geq 5)
Environmental tracking	Automatic Compensation
Operating environment	-40° C...82° C (-40°F...180° F) 0...95% relative humidity
Connection	10 Pin Male Molex 09-72-2101
Loop Compensation	Isolation transformer allows operation with poor quality loops
Loop Frequency	4 settings (low, med-low, med-hi, high)
Output Relays (2)	5A/125V AC Presence and Pulse
Extend output	3, 6 or 9 seconds DIP switch selectable
ASB (Automatic Sensitivity Boost)	Increases sensitivity after initial detection to prevent dropout due to high bed vehicles
Surge Protection	Loop circuitry protected by surge suppressors
Power / loop fault indicator	Green LED
Detect / frequency count indicator	Red LED
Reset Switch	Reset
Filter	Prevents detection from cross-traffic or RF interference (i.e. keying radio transmitter)
Sensitivity	10 levels 0-9
Environmental Protection	Conformal Coating

WARRANTY

EMX INC. the product described herein for a period of 2 years under normal use and service from the date of sale to our customer. The product will be free from defects in material and workmanship. This warranty does not cover ordinary wear and tear, abuse, misuse, overloading, altered products, or damage caused by the purchaser from incorrect connections, or lightning damage.

There is no warranty of merchantability. There are no warranties expressed, implied or any affirmation of fact or representation which extend beyond the description set forth herein.

EMX Inc. sole responsibility and liability, and purchaser's exclusive remedy shall be limited to the repair or replacement at EMX's option of a part or parts not so conforming to the warranty. In no event shall EMX Inc. be liable for damages of any nature, including incidental or consequential damages, including but, not limited to any damages resulting from non-conformity defect in material or workmanship.