


### Overview

The 4-Button Remote Control Transmitter can control up to four gate controllers. Each Remote Control Transmitter has a unique internal Identity, so that only the owner may access the gate system. The Remote Control Transmitter is compatible with various Liftmaster Wireless Products.

### Carton Inventory

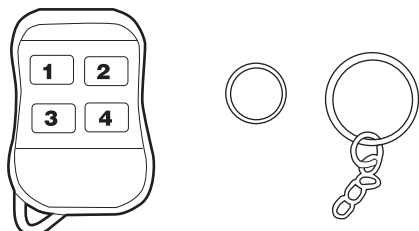

Remote Control Transmitter


### Operation

To open a gate using the Remote Control Transmitter, press the corresponding button for 3 seconds. For reliable operation use within 75' of the gate.

**Battery:** The Remote Control Transmitter uses a standard 12V remote control transmitter battery.

### Programming

#### Gate Access Panel (GAPLM)

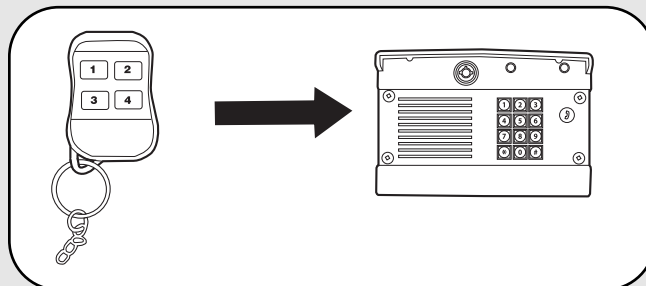

Up to 16 Remote Control Transmitter buttons can be programmed to the GAPLM.

**Step 1:** Enter Master PIN Number on GAPLM.

**Step 2:** Press "8".

**Step 3:** Then enter the Gate Control Unit (GCU) Identity (1-4). If there is only one GCU, enter "1". GAPLM will beep.

**Step 4:** Press and hold the Remote Control Transmitter button that is to be used for that GCU. The GAPLM will beep twice indicating programming is successful.

**NOTE:** A triple beep indicates that programming has failed. Repeat the steps above.

FOR TECHNICAL SUPPORT DIAL OUR TOLL FREE NUMBER:

1-800-528-2806

[www.liftmaster.com](http://www.liftmaster.com)

NOTICE: To comply with FCC and or Industry Canada rules (IC), adjustment or modifications of this receiver and/or transmitter are prohibited, except for changing the code setting or replacing the battery. THERE ARE NO OTHER USER SERVICEABLE PARTS.  
Tested to Comply with FCC Standards FOR HOME OR OFFICE USE. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.