



Reno A&E
4655 Aircenter Circle
Reno, NV 89502-5948 USA
Telephone: (775) 826-2020
Fax: (775) 826-9191
Website: www.renoae.com
E-mail: contact@renoae.com




MODEL PLH-R

PREFORMED LOOP INSTALLATION INSTRUCTIONS

Installation:

1. Make a trench that the loop and lead-in cable will be placed in.
2. Place the PLH-R Preformed Loop in the trench in the proper position and orientation.
3. Use the metal corner brackets to hold the loop cable in place.
4. Route the lead-in cable to the desired termination point.
5. Fill the trench and cover the loop and lead-in cable with the roadway material removed in Step 1. Be sure to bury the loop and lead-in cable deep enough to ensure that the loop and lead-in cable are protected from vehicle traffic.

NOTE: Loop detection height is typically $\frac{2}{3}$ the length of the shortest leg of the loop.
Keep this fact in mind when determining how deep to make the trench (Step 1).

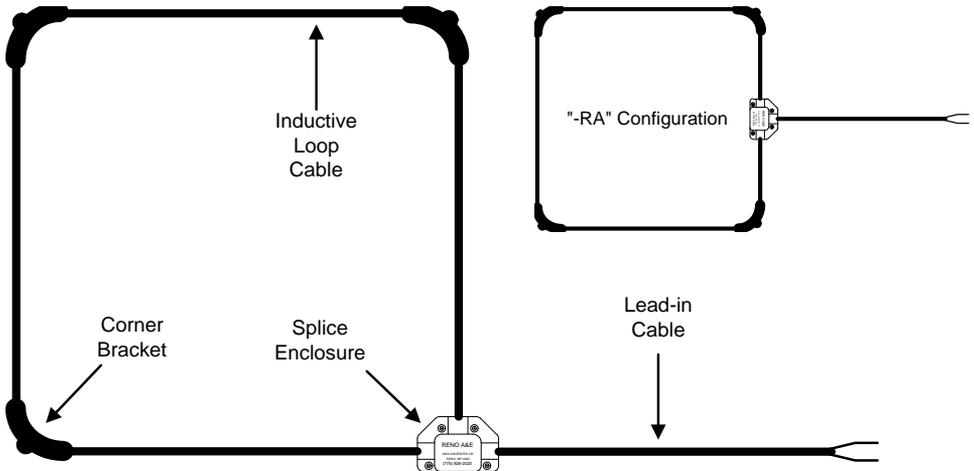



Reno A&E
4655 Aircenter Circle
Reno, NV 89502-5948 USA
Telephone: (775) 826-2020
Fax: (775) 826-9191
Website: www.renoae.com
E-mail: contact@renoae.com



MODEL PLH-R

PREFORMED LOOP INSTALLATION INSTRUCTIONS

Installation:

1. Make a trench that the loop and lead-in cable will be placed in.
2. Place the PLH-R Preformed Loop in the trench in the proper position and orientation.
3. Use the metal corner brackets to hold the loop cable in place.
4. Route the lead-in cable to the desired termination point.
5. Fill the trench and cover the loop and lead-in cable with the roadway material removed in Step 1. Be sure to bury the loop and lead-in cable deep enough to ensure that the loop and lead-in cable are protected from vehicle traffic.

NOTE: Loop detection height is typically $2/3$ the length of the shortest leg of the loop.
Keep this fact in mind when determining how deep to make the trench (Step 1).

